




# Specification

**Product:** 2835 series

**Model :** ALEDR904W

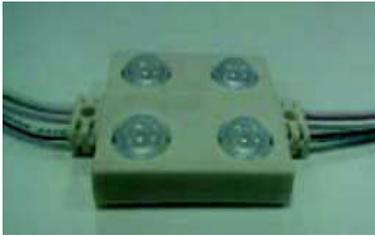

**Applications:**  
8-20cm depth advertising signage

**Features:**

1. 2835 SMD LED, long life, low attenuation, high efficacy
2. Cascade quantity up to 50pcs
3. Beam angle 160 deg.
4. Constant current, consistent brightness, stable performance
5. UL Compliant

**Installation:**

1. Back adhesive on products and screws for fixing.
2. Cuttable on wire between module.

**Warranty:**

5years or 22000 hours, whichever comes first.

**Optical and Electrical parameters:**

PRODUCT NO.	LED COLOUR	Colour Temperature (K)	Beam Angle (deg)	Luminous Flux (lm / piece)	CRI Ra	Luminous Efficiency (lm/W)	Working Voltage (V DC)	Working Current (mA / piece)	Power (W / piece)
ALEDR904W	DAYLIGHT	6000	160	140	≥75	97	12	120	1.44

**Others:**

PRODUCT NO.	LED COLOUR	Standard Qty per string (pcs)	Single-end power feed (pcs)	Double-end power feed (pcs)	Module weight / LED (g/piece)	Operating temperature (C)	Storage Temperature (C)	IP Grade
ALEDR904W	DAYLIGHT	25	25	50	15	-25 ~ +60	-25 ~ +70	IP65

**Remarks:**

Testing environment temperature 25±2 C

The above data are typical values; the actual data for each single product could differ from the typical values.

The data subject to change without notice.

