

Ausled Specification

Product Name: LED Flex strip

Model: ALEDT2835-60 SERIES

2835-60



32835-60 WP



Applications

Indoor use only, such as in KTV, shopping mall, cabinet etc. for cove and contour lighting.

Features

- 1、High luminous efficacy with 2835 SMD LED mounted;
- 2、Can be cut at the printed marks;
- 3、CE、RoHS compliant.

Installation

- 1、Easy installation with double-sided adhesive tape.
- 2、Multiple installation and fixing options available with the minimum bending diameter as 5cm [1.96in].

Warranty

3years or 13000 hours, whichever comes first.

Optical and Electrical Parameters:

P/N	LED Color	Color Temperature(K)	Beam Angle (°)	Luminous Flux (lm/m)	CRI	Luminous Efficacy (lm/W)	Working Voltage (V DC)	Working Current (mA)		Power (W)	
								1m [39.37in]	5m [196.85in]	1m [39.37in]	5m [196.85in]
ALEDT2835-60DL	Daylight	6000K	115	420		75	12	450	2000	5.4	24
ALEDT2835-60CW	Cool White	3900~4300K	115	420	≥ 75	76	12	450	2000	5.4	24
ALEDT2835-60WW	Warm White	2700~3000K	115	420	≥ 75	76	12	450	2000	5.4	24
ALEDT2835-60DL WP	Daylight	6000K	115	340		63	12	450	2000	5.4	24
ALEDT2835-60WW WP	Warm White	2700~3000K	115	340	≥ 75	63	12	450	2000	5.4	24
ALEDT2835-60CW WP	Col White	3900~4300K	115	340	≥ 75	63	12	450	2000	5.4	24

Others :


P/N	LED Color	Standard length		Max. Length		LED Qty (pcs/m)	Operating Temperature		Storage Temperature		IP code
		(m)	(in)	(m)	(in)		(°C)	(°F)	(°C)	(°F)	
ALEDT2835-60DL	Daylight	5	196.85	5	196.85	60	-25~+60	-13~+140	-25~+70	-13~+158	IP33
ALEDT2835-60CW	Cool White										
ALEDT2835-60WW	Warm White										IP65
ALEDT2835-60DL WP	Daylight										
ALEDT2835-60WW WP	Warm White										
ALEDT2835-60CW WP	Cool White										

Notes:

- ① Testing environment temperature: $25\pm 2^{\circ}\text{C}$ [$77\pm 3.6^{\circ}\text{F}$];
- ② The actual data of each single product may differ from above typical data, which are subject to change without prior notice;
- ③ The color temperature may vary due to reflection of silica gel for fill with silica gel series. Above CCT belong to bare light.

Profile Drawings:

Unit: mm [in]

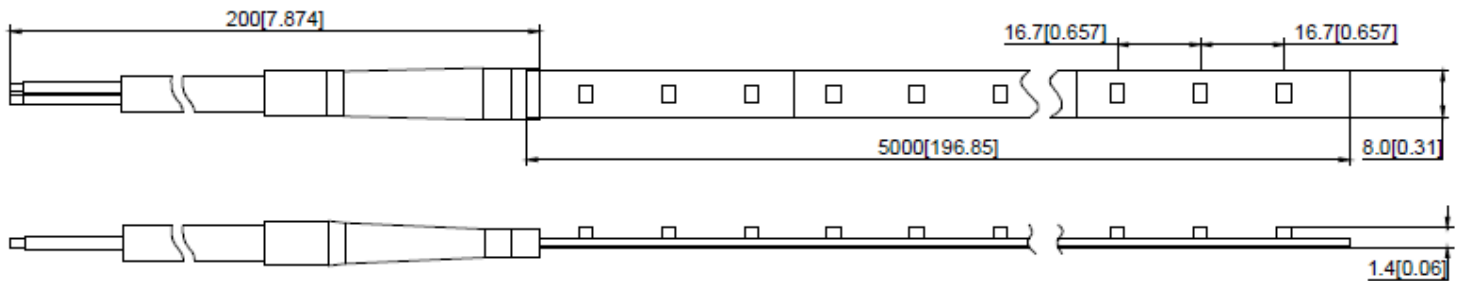

AUSLED PTY LTD

Factory 27, 35-37 Jesica road

Campbellfield VIC 3061

AUSTRALIA

PH : +613 9357 0404

FX : +613 9357 8525

Email : sales@ausled.com.au

Web : www.ausled.com.au